

Lighting

Metal Outside Light

Projection: 6"
Bulbs: One 60W (not included)
UL listed. Black finish.
Use with 0280902.



0280903 Fixture **Only**; 24/Ctn.
0280902 Glass Globe **Only**; 48/Ctn.

Brushed Nickel Porch Light

Brushed nickel with glass.



0280105 12/Ctn.

Plastic Outside Light

Projection: 5-3/4"
Bulbs: One 60W (not included)
UL listed.



0280904 Black Fixture **Only**
0280902 Glass Globe **Only**; 48/Ctn.
0280906 White Fixture **Only**
0280907 Replacement Hardware



Porch Light

Height: 17-1/2"
Projection: 8-1/2"
Bulbs: One 60W (not included)
Mounting Base: 4-3/4"



0284034 Black
0284035 White

Exterior Light



0280106 Rustic Petina
0280107 Brushed Nickel
(shown)

Ceiling Fan with Light Kit

52" ceiling fan with three tulips lights. Silicon steel motor. Limited lifetime warranty. Motor size: 153 x 12. Triple capacitor, 3-speed reversible, dual mount, five blades, 12 degree pitch.

0284065 Brushed Nickel with Oak Blades
0284070 White
0281202 Alabaster replacement globes



Outdoor
Improvements

Anchors &
Set-Up Material

Doors &
Windows

Coatings &
Cleaners

Appliances

Tools &
Hardware

Carpet &
Flooring

Electrical

Plumbing

Towing &
Safety

Heating &
Cooling

Domed Ceiling Fixture

Interior ceiling fixture with white alabaster domed globe. 11"



0280331 White (shown)

0280330 Brushed nickel

8" Two-Bulb Light Fixture

Interior, 2-Bulb, polished brass light fixture. *Globe sold separately.*



0280503 Base Only, 8"

0280502 Alabaster globe for 8" fixture

Single Bulb Ceiling Fixture

Interior ceiling fixture. 4-7/8"
Globes sold separately.



0280099 Base Only, White

0283701 Smooth white globe

0284030 Clear ribbed glass globe

6" Single Bulb Fixture

Globe sold separately.



0280403 White fixture 24/ctn

0280098 Polished brass fixture w/pull chain 24/ctn

0280402 Alabaster glass globe for 6" fixture

Two-Bulb Fixture

Projects 6", white fixture, uses two 60W (not included).



0280103 24/Ctn.

Replacement Shades

15" alabaster swirl glass.

0280301 12/ctn



14" plastic diffuser.

0280102 48/ctn



12" square glass diffuser.

0280201 12/ctn



Three-Lamp Wall Mount Fixture

24" brushed nickel with white alabaster globes.
 Fixture comes with 3 shades.



0284047 2/cs

0284050 Replacement globes, 12/ctn

Two-Arm Wall Mount Fixture

Brushed nickel. *Shades sold separately.*



0284045 Fixture 12/cs

0284050 White Alabaster Shade 12/ctn.

Energy-Saving Fluorescent 10,000 Hour Closet Light



0280120 Closet Light w/ Fluorescent Bulb

Specifications Subject to Change without Notice

Two-Arm Wall Mount Fixture.

14" brushed nickel fixture. *Shades sold separately.*



0284049 6/Ctn.

0284050 White Alabaster Shade 12/ctn.

Brass Arm Wall Fixture

Projection: 6"
 Height: 8"
 Finish: Polished brass
 Bulb: One 60W
 Neck: 2-1/4"

(Shade and bulb not included)



0280405 Brass Arm

0280409 Brass Arm with Wall Switch

0281202 replacement globes

Light Shade Screws

Brass screws for light fixtures.



0281501 Standard Size w/Smooth Head, Bulk

0281505 Small Metric w/Phillips Head; 100/Pk.

Shade Nuts

0285026



Acorn Nuts

White plastic; 50/Ctn.

0281605



Outdoor Improvements

Anchors & Set-Up Material

Doors & Windows

Coatings & Cleaners

Appliances

Tools & Hardware

Carpet & Flooring

Electrical

Plumbing

Towing & Safety

Heating & Cooling

Replacement Shades

7.25" white alabaster glass globe with 1.5" screw-in throat.
0284050



Smooth Glass Globe – 3-1/4" throat opening
0283701



White alabaster glass
0280402 6" opening, 24/ctn
0280502 8" opening, 12/ctn



Clear cut crystal glass 6" dia x 6" high with a 3-1/4" throat opening.
0283704



Alabaster Glass – 2-1/4" throat
0281202 24/ctn



Clear ribbed glass – w/3-1/4" throat opening.
0284030



Spiral CFL Bulbs



0281714 13W (Equiv. 60W)
0281715 20W (Equiv. 75W)
0281716 23W (Equiv. 100W)

Standard 60 Watt Bulb

Frosted bulbs by Supreme Lighting. Dependable; long-lasting. 60 watt. 120 bulbs per case.



0281705

Flame Bulbs

Clear 130-volt. 40W; 25/Ctn.



0281702 Candelabra Base
0281725 Medium Base

Vanity Bulbs



0281710 3.75", 60W
0281709 3", 40W

Torpedo Bulbs

Clear 130-volt. 25W; 25/Ctn.



0281701 Candelabra Base
0281726 Medium Base

Wall Plates, Switches and Receptacles



Single Switch Plate

- 0222301** Ivory; 250/Ctn.
- 0222303** White; 250/Ctn.
- 0222302** Brown; 250/Ctn.

Duplex Receptacle Plate



- 0222601** Ivory; 250/Ctn.
- 0222603** White; 250/Ctn.
- 0222602** Brown; 250/Ctn.

Midi Switch Plate

For larger boxes: 3-1/8" W x 4-7/8" H.



- 0222304** Ivory; 100/Ctn.
- 0222295** White; 100/Ctn.
- 0222305** Brown; 100/Ctn.

Midi Receptacle Plate

For larger outlet boxes: 3-1/8" W x 4-7/8" H for single gang. 100/Ctn.



- 0221203** Ivory
- 0221205** White
- 0221204** Brown

Double Switch Plate

4-15/16" W x 4-7/8" H. 100/Ctn.



- 0222300** Ivory
- 0222299** White

Duplex Receptacle

Parallel grounding 15 amp 125V. UL listed. 100/Ctn.



- 0221201** Ivory
- 0221200** White
- 0221202** Brown

Toggle Switch

10-A-125V; 5-A-250V. 1" wide mounting strap. 100/Ctn.



- 0221701** Ivory
- 0221702** Brown
- 0221703** White

Single Blank

- 0225005** White; 100/Ctn.
- 0225006** Brown; 100/Ctn.
- 0225007** Ivory; 100/Ctn.

Double Blank

- 0225008** Brown; 50/Ctn.
- 0225009** White; 50/Ctn.
- 0225010** Ivory; 50/Ctn.



Wall Plates, Switches and Receptacles

Duplex Receptacle & Plates

Universal duplex. U-bend contact design for maximum conductivity and plug retention; exceeds UL standard for abrupt plug pull-out. UL498 listed.



0222345 WDRU15IV; Ivory
0222347 WDRU15WT; White

- Side snaps assure proper alignment; quick to install. No screws to lose. Virtually unbreakable thermoplastic. Smooth surface for easy cleaning. Single gang.



0222346 WPRUIV, Ivory
0222348 WPRUWT, White

Decorator Plates & Switches



Accommodates both decorator switches & receptacles. Furnished w/long screws. 100/Ctn.

0222308 White
0222309 Ivory
0222310 Brown

- Touch-A-Matic single pole w/grounding terminal on E-Z wire device. Sealed against dust. High endurance.

0222311 Ivory; 100/Ctn.
0222294 White; 100/Ctn.



Self-Contained Receptacle

Use 14-2/G or 12-2/G NM cables for in-line or end-of-line use. UL listed. 100/Ctn.



0222326 White
0222322 Ivory
0222321 Brown

Snap-On Plate



0222355 White
0222356 Ivory
0222357 Brown

Mounting Ear



0222325 Plastic Pawl (Wing)

Self-Contained Switch

Use 14-2/G or 12-2/G NM cables for in-line or end-of-line use. UL listed. 100/Ctn.



0222327 White

Self Contained Receptacle, Switch, and Plates

Self-Contained Receptacle

Single pole in-line.
15A/125V;
100/Ctn.



- 0222313** Ivory, Plate & Switch
- 0222314** Brown
- 0222330** White

Self-Contained Rocker Switch

Decorator quiet-touch. Single pole in-line. For sheet rock 5/16" to 1/2" thick or wall paneling 5/32" to 1/2" thick. Use only nonmetallic sheathed cable; types NM & MNC having copper conductors sizes #14 and #12 AWG. 15 amp/120 VAC; 100/Ctn.



- 0222315** Ivory
- 0222316** Brown
- 0222329** White

Plates



SINGLE, 100/Ctn

- 0222318** Ivory
- 0222317** Brown
- 0222331** White

DOUBLE, 100/Ctn

- 0222324** Ivory
- 0222323** Brown
- 0222332** White

Ground Fault Interrupter Receptacle w/Plate


Fits easily into standard surface flush boxes. Feed-through ready. UL listed. 15 amp 125V at receptacle 20 amp 125V feed-through. 10/Ctn.



- 0222889** White
- 0222891** Ivory

Phone Jack

Surface mount, snap cover for neat appearance with pre-wired combination head screw terminals. For surface mount onto baseboards, walls and other flat surfaces. Self-tapping mounting screws and adhesive pad provided. 4 conductor in almond.

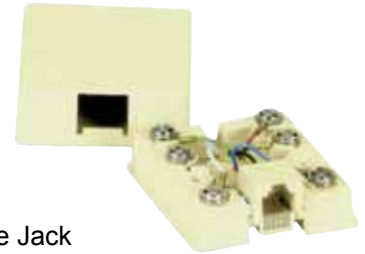

- 0222820** Phone Jack

Weatherproof Male Motor Base

Three-wire outdoor wire receptacle with snap cover. Parallel grounding motor base. #999I.



- 0222815** 50/Ctn.

Weatherproof Protective Plate

Weatherproofs any conventional or "U" ground duplex receptacle, duplex switch or combination switch/receptacle. Snaps shut with self-sealing rubber gaskets. Indestructible Lexan® polycarbonate. 50/Ctn.



- 0221400** Gray
- 0221405** White

Foam Seals




- 0270221** Outlet. Box of 144
- 0270222** Switch. Box of 144

Wiring Devices

Two-Gang

Plastic. OD: 1-3/4" D, 3-1/4" H, 4-1/16" W. Ears securely molded to box. Wire clamps included; bulk packaged.



0221104

Single-Gang


Plastic. OD: 1-3/4" D, 3-3/4" H, 2-3/8" W. Ears securely molded to box.



- 0221103 W/Ears
- 0221105 W/Ears & Swing Bracket
- 0222325 Plastic Wings (Pawls)
- 0222328 Screws for Wings

Round Box

3.5" round outlet box, 2-1/8" diameter w/high clamps, ears and snap-in bracket which secures box to wall or ceiling.



0221106

Thermostat Wire


20 gauge. UL listed.

- 0220308 2 Wire, 500'
- 0220310 5 Wire, 250'
- 0220313 8 Wire, 250'



Range Cord


4', 50 amp cord w/three #6 and one #8 conductors with molded cap and terminal plugs. 12/Ctn.



0220306

Range Receptacle

4-wire, 50 amp, 125/250-volt range receptacle with "Quick-Lok" terminals. 50/Ctn.



0224201

MH 4-Wire Dryer Cord




Round rubber jacketed wire, molded-on plug. Black 4-wire 4' for mobile homes, 30 amp. 12/Ctn.

0220307

Dryer Receptacle

4-wire, 30 amp, 125/250-volt dryer receptacle with "Quick-Lok" terminals. 50/Ctn.



0224301

3-Wire Female Plug

15 amp 125V furnished with cord clamp for heavy duty use. Standard plug with parallel prong. UL listed.



0223301 100/Ctn.

3-Wire Male Plug

Solid brass plug blades are firmly embedded in body. Terminal screw clamps are designed to contain wire and prevent binding. Terminal screws backed out – ready for wiring. Terminals to positively insulate conductors. Combination

slot/Phillips head mounting and terminal screws ease installation.

15 amp, 125V, thermoplastic rubber cord. Dia. .25 - .60". UL listed.

0223201



Cables & Conduits

Non-Metallic Liquidtight Fittings



Elbow




Straight Connector

For use with non-metallic liquid tight conduit, Type B. Provides smooth connection, no sharp edges to strip wire. Wiring easily pulls through. **Plastic material.**

- 0220431** 1/2" Elbow
- 0220434** 3/4" Elbow
- 0220430** 1/2" Straight Connector
- 0220433** 3/4" Straight Connector

PVC Conduit



0220441 3/4" x 10"

PVC Condensate P-Trap




0100545 3/4"


Ultra Whips – Convenience Kit

Quick wiring in three distinct colors for easy A/C hook-up. 90-degree connector is removable for straight connections (Straight connector not included). 1/2" x 4' THHN wire. Non-metallic connectors.

- 0220405** 10 G, 1/2" x 4'; 6/Ctn.
- 0220410** 8 G, 1/2" x 4'; 6/Ctn.
- 0220412** 10 G, 1/2" x 6'; 6/Ctn.



Non-Metallic Sheathed Cable



- Uncoated copper conductors ASTM B-3
- Insulation Cresin-90 PVC compound, color-coded
- Two conductors are laid parallel with ground wire and paper separator
- Three conductors are twisted with cable fillers with wrapped ground wire to form round core
- Smooth 30 mil PVC jacket overall

Materials, test and construction in accordance with ANSI/UL 719 and Federal Specification J-C-30A.

- 0220425** 8-2 NM w/Ground, 125'
- 0220427** 12-2 NM w/Ground, 250'
- 0220424** 10-2 NM w/Ground, 250'


Liquidtight Flexible Non-Metallic Conduit

For electrical applications outside, inside and industrial uses including transformer connections, air conditioning and heating. Joins with metallic or non-metallic connectors, easy to cut conduit is impact resistant, chemical resistant and will not kink or fracture.



- 0220408** 1/2" x 100' Roll
- 0220432** 3/4" x 100' Roll

Underground Feeder Cable



- Solid copper 2 or 3 conductors
- 90° PVC insulation, color coded, insulated conductors and bare ground laid parallel
- 600 Volts
- Sunlight resistant PVC jacket compound

Materials, test and construction in accordance with ANSI/UL 493 and Federal Specification J-C-30A.

- 0220426** 10-2 UF w/Ground, 250'

Thermostat Wire




20 Gauge. UL Listed.


- 0220308** 2 Wire; 500'
- 0220310** 5 Wire; 250'
- 0220313** 8 Wire; 250'

Circuit Breakers & Disconnects

Homeline Circuit Breakers




10,000 Amperes RMS — UL listed Interrupting Rating 120/240Vac. 15-30 Ampere breakers are suitable for use with 60°C or 75°C conductors. 40-125 Ampere breakers are suitable for use with 75°C conductors.



- 0220977** 15 Amp, 1 Pole ◆▲
- 0220982** 20 Amp, 1 Pole ◆▲
- 0220979** 20 Amp, 2 Pole, Common Trip ◆
- 0220980** 30 Amp, 2 Pole, Common Trip ◆
- 0220981** 40 Amp, 2 Pole, Common Trip ◆
- 0220983** 50 Amp, 2 Pole, Common Trip ◆
- 0220984** 60 Amp, 2 Pole, Common Trip ◆


- ◆ UL listed as SWD (switching duty) rated. Suitable for 120VAC fluorescent lighting loads.
- ▲ UL listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.

Homeline Tandem Circuit Breakers



10,000 AIR — One Pole Tandem 120/240Vac (one space required). 15-20 Ampere one pole tandem breakers are suitable for use with 60°C or 75°C conductors. 15-30 Ampere two pole tandem breakers are suitable for use with 75°C conductors.

- 0220989** 15 and 20 Amp
- 0220978** 20 and 20 Amp
- 0220993** 30 and 15 Amp



Homeline Quad Tandem Circuit Breakers

10,000 AIR — Two Pole Tandem 120/240Vac (two spaces required). Represents two 1-pole outer poles and one 2-pole inner breaker with common trip. 15-20 Ampere one pole tandem breakers are suitable for use with 60°C or 75°C conductors. 15-30 Ampere two pole tandem breakers are suitable for use with 75°C conductors.

- 0220986** Two 20 Amp 1 Pole, 30A 2 Pole
- 0220987** Two 20 Amp 1 Pole, 40A 2 Pole
- 0220988** Two 20 Amp 1 Pole, 50A 2 Pole

Disconnect Switches

- * Fuses install into pull-out handle.
- * Line, load, and ground terminals aligned for easy hook up with heavy wires.
- * Reversible side-opening door.
- * Indicator lights for blown fuses.
- * Full dead front.
- * Folding pivot locking tab.
- * Knockouts accommodate three sizes (1/2", 3/4", and 1").
- * Rear entry knockouts.
- * Heavy gauge steel case.
- * Standard 1/4" head screw on dead front.

- * Large internal wiring space.
- * Installs without removing internals.
- * UL/CUL listed.
- * Multi-lingual packaging.
- * No sharp edges on the metal case.
- * Center slotted hanging hole for easy level wall mounting.
- * Tough epoxy powder coat finish — UV stabilized.
- * Long-lasting plated copper electrodes.
- * Operate and store positions for disconnect pull-out.

METALLIC

Part #	Description	HP Max	Line	Load	Equip. Grounding Terminals Al/Cu
0220406	60 Amp, Not-Fusible	10	#14-#3	#14-#3	(2) #14-#4

NON-METALLIC

Part #	Description	HP Max	Line	Load	Equip. Grounding Terminals Al/Cu
0220409	60 Amp, Not-Fusible*	3	#14-#3	#14-#3	(6) #14-#4

* Does not contain overcurrent protection. Suitable for use on systems with up to 10K RMS symmetrical amperes available fault current at 240 Vac when protected by a fuse or circuit breaker rated 60 Amperes or less.



Pipe Protection

EASYHEAT[®] AHB Electric Pipe Heating Cable

Pre-Assembled Sets

Freeze protection on metal and plastic pipe. Complete, ready-to-install system in one compact box. CSA certified and UL listed. 120 VAC, 7 watts/ft., PVC inner insulation. Continuous ground braid, 3-wire grounded cord and plug

(24") with weather-resistant PVC outer jacket, moisture-proof snap-action thermostat. "On" at approximately 38° F and "Off" at approximately 45° F.



Selection Table for AHB Models

Stock #	Heated Section Length in feet	Watts	Amps 120V Only	UL & CSA listed Automatic Cable w/Thermostat 120VAC
S.O.	3	21	.2	AHB-013
0270515	6	42	.4	AHB-016
0270516	9	63	.5	AHB-019
0270517	12	84	.7	AHB-112
0270518	15	105	.9	AHB-115
0270519	18	126	1.1	AHB-118
0270520	24	168	1.4	AHB-124
0270521	30	210	1.8	AHB-130
S.O.	40	280	2.3	AHB-140
S.O.	60	420	3.5	AHB-160
S.O.	80	560	4.7	AHB-180



Self-Regulating, Cut-to-Length Cable

Freeze Free[®] Cable – Self-regulating pipe heating cable that automatically varies its heat output with changes in surrounding temperature. Freeze Free cable helps keep plastic and metal water pipes from freezing to -60°F/-51°C. A braided metal jacket provides an electrical ground as well as protection against

damage in dry locations. Freeze Free cable is available on reels of 100 feet, 300 feet and 500 feet and can be cut to desired lengths per application.

Pre-packaged lengths of 5 feet and 15 feet are also available.

3 watts per foot, 120 VAC at 50°F; 75-foot maximum circuit length, 3-foot minimum circuit length.



- 0272305 100' Reel
- 0272306 300' Reel
- 0272304 500' Reel

Outdoor Improvements
 Anchors & Set-Up Material
 Doors & Windows
 Coatings & Cleaners
 Appliances
 Tools & Hardware
 Carpet & Flooring
 Electrical
 Plumbing
 Towing & Safety
 Heating & Cooling

EASYHEAT[®] FREEZE[®] Pre-Packaged Kits

Warming Your World

Custom pipe freeze protection at off-the-reel prices! Choose pre-packaged systems or for longer cable needs, just cut off the required length from the reel dispenser and attach plug, packaged separately. Freeze-Free uses a self-regulating conductive core

that reacts to changes in temperature, needing no thermostat. Patented fused plug—the same quality connector used by the industry since 1992—installs in minutes with basic household tools. Approved for use on both plastic and metal to -20° F. UL listed.

Kits contain indicated length of Freeze-Free Cable, one fused plug kit, (1) instruction sheet and (1) set of warning labels.

0272314 5' Kit; 5/Ctn.

0272316 15' Kit; 5/Ctn.



Floor Display



Freeze Free Display

Display contains 100' feet of cable with a pegboard holder, ten plugs and an attractive header with a supply of application guides. Other Freeze Free items can be added to complete an effective sales center.

0272308 Sales Center

Fused Plug Kits

- Grounded 30" cord-set requires less heating cable
- Power indicator light shows that power gets to the plug and indicates an intact fuse
- UL System Listed
- Pipe mounting brackets for easy attachment to typical water pipes
- Built-in, fast-reaction fuse
- Easy to install: just insert the cable into the plug and tighten the screws
- Same reliability
- Now supports up to 75 feet of Freeze Free cable

0272307 Kit, Clam Shell

0272317 Kit; Bulk

0272310 End Caps, 5/Bag; 10/Ctn.



Thermostat



- 35°F Automatic "On" ■ 45°F Automatic "Off" (approximately)
- Controls any 120 volt heater, heating cables, engine heaters, electric heaters, heat lamps

No special wiring, easy to install—just plug it in. Reduces energy consumption. One outlet with an indicator light to let you know unit is functioning. 1800 watts maximum, 15 amps, 120 volts.

0272318

NOTE: USE ON SPECIFIC VOLTAGE ONLY; MAKE SURE ELECTRICAL OUTLET IS NOT OVERLOADED.

