


Thermostats

Heating T-Stat with Thermometer

Economical 24 volt, wall-mounting heat-only thermostat with setting range of 50° to 90°F, 10° to 30°C with nominal 2°F differential. 2 wire, mercury free, environmentally safe. Bimetal sensor with an open contact switch that is enclosed for dust protection, allowing thermostat to be quickly installed without the critical leveling necessary with other thermostats. 3-1/6" square, 1-1/4" deep. Heat anticipation range of .18 to 1.0 amp.



Robertshaw
UNI-LINE
NORTH AMERICA

0237801 100-401; 50/Ctn.

Thermostat

Low voltage, 24 VAC (30 VAC max.). .015 to 1.2 amps heating, 0 to 1.5 amps cooling. Snap action switch. Heating anticipator rating adjustable from 0.15 to 1.2 amps. Cooling anticipator rating fixed. 50°F to 90°F, 10°C to 30°C.

0238129 Heat Only
(Mfr# 918082)

0103001 Heat & Cool
(Mfr# 903992)

0103002 Subbase Only
(Mfr# 903996)
(replacement only;
will not work with 0238129)



Thermostats



White
Rodgers™


0103004
Digital, shown

Range 50° to 90° on heating and cooling cycle with differential of 2°F. 6.3" x 2.75" x 1.72". Mercury switches 1.5 amps at 24 volts. Slide switches 2 amps at 24 volts.

0103003 Heat/Cool

0103004 Digital Heat Pump

SAVERSTAT® Programmable Electronic T-Stat



For single stage heating & A/C systems with 24V controls. Standard "AA" battery included. One-button programming & hotline for technical assistance. Meets or exceeds all state/federal laws/guidelines requiring automatic setback thermostats. No subbases to stock or install. Large memory. Automatic compressor short-cycle protection. Four time and temp changes per weekday, 2 per weekend day.

0102998 For A/C; 24/Ctn.
(Mfr# 9600)

0102997 F/Heat Pump; 24/Ctn.
(Mfr# 9620)

Nordyne "E" Thermostat

Digital, cost-efficient. Wall-mount. Low voltage. Batteries are not required. Temperature and mode settings are preserved with the power off.

Programmable

0102993 Heat & Cool
(Mfr# 919732)

0102994 Heat Pump
(Mfr# 919738)



0102993 shown

Non-programmable

0102995 Heat & Cool
(Mfr# 917432)

0102996 Heat Pump
(Mfr# 917433)



0102995 shown

Nordyne Digital T-stat Heat & Cool



0103013 Non-programmable.
(Mfr# 904609) shown.

0102989 Programmable
(Mfr# 555559)



Nordyne Digital T-stat Heat & Cool




Non-programmable.

0103014 (Mfr# 920755)

HVAC Accessories

Non-Metallic Liquidtight Fittings

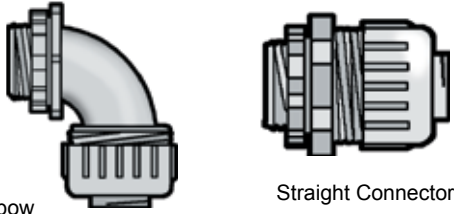


Elbow

Straight Connector

For use with non-metallic liquid tight conduit, Type B. Provides smooth connection, no sharp edges to strip wire. Wiring easily pulls through. **Plastic material.**

- 0220431** 1/2" Elbow
- 0220434** 3/4" Elbow
- 0220430** 1/2" Straight Connector
- 0220433** 3/4" Straight Connector

PVC Conduit



0220441 3/4" x 10"


PVC Condensate P-Trap



0100545 3/4"


Ultra Whips – Convenience Kit

Quick wiring in three distinct colors for easy A/C hook-up. 90-degree connector is removable for straight connections (Straight connector not included). 1/2" x 4' THHN wire. Non-metallic connectors.



- 0220405** 10 G, 1/2" x 4'; 6/Ctn.
- 0220410** 8 G, 1/2" x 4'; 6/Ctn.
- 0220412** 10 G, 1/2" x 6'; 6/Ctn.

Non-Metallic Sheathed Cable



- Uncoated copper conductors ASTM B-3
- Insulation Cresin-90 PVC compound, color-coded
- Two conductors are laid parallel with ground wire and paper separator
- Three conductors are twisted with cable fillers with wrapped ground wire to form round core
- Smooth 30 mil PVC jacket overall

Materials, test and construction in accordance with ANSI/UL 719 and Federal Specification J-C-30A.

- 0220425** 8-2 NM w/Ground, 125'
- 0220427** 12-2 NM w/Ground, 250'
- 0220424** 10-2 NM w/Ground, 250'


Liquidtight Flexible Non-Metallic Conduit

For electrical applications outside, inside and industrial uses including transformer connections, air conditioning and heating. Joins with metallic or non-metallic connectors, easy to cut conduit is impact resistant, chemical resistant and will not kink or fracture.



- 0220408** 1/2" x 100' Roll
- 0220432** 3/4" x 100' Roll

Underground Feeder Cable



- Solid copper 2 or 3 conductors
- 90° PVC insulation, color coded, insulated conductors and bare ground laid parallel
- 600 Volts
- Sunlight resistant PVC jacket compound

Materials, test and construction in accordance with ANSI/UL 493 and Federal Specification J-C-30A.

- 0220426** 10-2 UF w/Ground, 250'

Thermostat Wire



20 Gauge. UL Listed.


- 0220308** 2 Wire; 500'
- 0220310** 5 Wire; 250'
- 0220313** 8 Wire; 250'

HVAC Accessories

Homeline Circuit Breakers




10,000 Amperes RMS — UL listed Interrupting Rating 120/240Vac. 15-30 Ampere breakers are suitable for use with 60°C or 75°C conductors. 40-125 Ampere breakers are suitable for use with 75°C conductors.



- 0220977** 15 Amp, 1 Pole ◆▲
- 0220982** 20 Amp, 1 Pole ◆▲
- 0220979** 20 Amp, 2 Pole, Common Trip ◆
- 0220980** 30 Amp, 2 Pole, Common Trip ◆
- 0220981** 40 Amp, 2 Pole, Common Trip ◆
- 0220983** 50 Amp, 2 Pole, Common Trip ◆
- 0220984** 60 Amp, 2 Pole, Common Trip ◆


- ◆ UL listed as SWD (switching duty) rated. Suitable for 120VAC fluorescent lighting loads.
- ▲ UL listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.

Homeline Tandem Circuit Breakers



10,000 AIR — One Pole Tandem 120/240Vac (one space required). 15-20 Ampere one pole tandem breakers are suitable for use with 60°C or 75°C conductors. 15-30 Ampere two pole tandem breakers are suitable for use with 75°C conductors.

- 0220989** 15 and 20 Amp
- 0220978** 20 and 20 Amp
- 0220993** 30 and 15 Amp



Homeline Quad Tandem Circuit Breakers

10,000 AIR — Two Pole Tandem 120/240Vac (two spaces required). Represents two 1-pole outer poles and one 2-pole inner breaker with common trip. 15-20 Ampere one pole tandem breakers are suitable for use with 60°C or 75°C conductors. 15-30 Ampere two pole tandem breakers are suitable for use with 75°C conductors.

- 0220986** Two 20 Amp 1 Pole, 30A 2 Pole
- 0220987** Two 20 Amp 1 Pole, 40A 2 Pole
- 0220988** Two 20 Amp 1 Pole, 50A 2 Pole

Disconnect Switches

- * Fuses install into pull-out handle.
- * Line, load, and ground terminals aligned for easy hook up with heavy wires.
- * Reversible side-opening door.
- * Indicator lights for blown fuses.
- * Full dead front.
- * Folding pivot locking tab.
- * Knockouts accommodate three sizes (1/2", 3/4", and 1").
- * Rear entry knockouts.
- * Heavy gauge steel case.
- * Standard 1/4" head screw on dead front.

- * Large internal wiring space.
- * Installs without removing internals.
- * UL/CUL listed.
- * Multi-lingual packaging.
- * No sharp edges on the metal case.
- * Center slotted hanging hole for easy level wall mounting.
- * Tough epoxy powder coat finish — UV stabilized.
- * Long-lasting plated copper electrodes.
- * Operate and store positions for disconnect pull-out.

METALLIC					
Part #	Description	HP Max	Line	Load	Equip. Grounding Terminals Al/Cu
0220406	60 Amp, Not-Fusible	10	#14-#3	#14-#3	(2) #14-#4


NON-METALLIC					
Part #	Description	HP Max	Line	Load	Equip. Grounding Terminals Al/Cu
0220409	60 Amp, Not-Fusible*	3	#14-#3	#14-#3	(6) #14-#4

* Does not contain over-current protection. Suitable for use on systems with up to 10K RMS symmetrical amperes available fault current at 240 Vac when protected by a fuse or circuit breaker rated 60 Amperes or less.



HVAC Accessories


Fiberglass Filters



- 0103131** 16" x 20" Hog Hair; 100/Ctn.
- 0238175** 20" x 20"; 12/Ctn.
- 0231287** Rolled Foam (24" x 25' x 1/4")

Filters & Retainers

- 0100598** Electric Furnace Filter 15-7/8" x 19" (Nordyne #917763)
- 0238173** Filter 1/4" x 16" x 26" F/CMF & CMH Miller furnaces. (Miller #102957040)
- 0238169** Retainer f/CMF Filter
- 0238171** Filter 1/4" x 19" x 36" F/Amm Coleman President II (Coleman #7660-3401)
- 0238172** Retainer f/Coleman Filter
- 0231283** Filter 1/4" x 19" x 54" F/all Intertherm/Miller MGH Series (Nordyne #6683560)
- 0238170** Retainer f/F-30 Filter, Intertherm & Miller 'MGH' furnace 75 pcs./carton, needs 3 for ea. filter. 238174 Filter Kit
- 0231284** Filter for M2RL 18" x 20" x 1
- 0231288** MAC "Sock" Filter 17" x 54"
- 0238167** E2EB-B 16" x 20", disposable, w/out A/Coil installed) (Nordyne #668934)

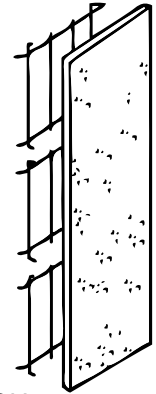

Slimfold Furnace Door


Single panel, full-louvered doors. White finish is electrostatically applied, baked-on enamel. No jamb required. Welded on hinge. Comes with hinges, screws and knob.



Part Number	Door Width	Finished Opening Size	Free Air Space
0211990	20"	20.5" x 80.5"	238 Sq. In.
0211991	22"	22.5" x 80.5"	257 Sq. In.
0211992	24"	24.5" x 80.5"	261 Sq. In.

Thermocouples


Fully universal, fits push-in, screw-in or clamp-on type pilot burners.



- 0232501** 18"; 24/Ctn.
- 0232502** 24"; 24/Ctn.
- 0232503** 30"; 24/Ctn.
- 0231350** 24"; 10/Ctn. (Nordyne)
- 0231351** 18"; 10/Ctn. (Nordyne)

Gas Heating Valve

Robertshaw
UNI-LINE
 NORTH AMERICA

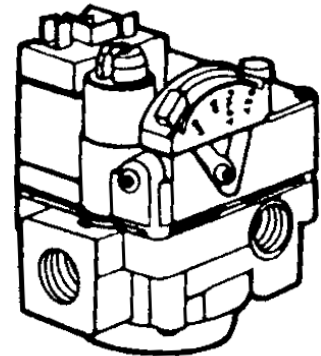

24V model used with a constant pilot. Pressure regulator. 3/4" FPT Inlet. 3/4" FPT outlet. Side outlet 1/2" FPT w/plugs. 150,000 capacity. Includes one 1/2" x 3/8" reducer bushing.

0231337

Flexible Gas Connectors



1" Supr-Safe Stainless Steel Gas Connectors



Dormont No-Neck



Ordinary Neck

Dormont's exclusive No-Neck design eliminates the danger of stress cracks in connectors where the straight tubing of the neck enters the nut.

As the inventor of the stainless steel gas connector with over 50 years of proven field experience, Dormont is the most trusted name in gas connectors. AGA listed for both outdoor and indoor use. Annealed 304 stainless steel, PVC coated.




1" OD (3/4" ID) with 3/4" FPT x 3/4" MPT.


0250812 24"

0250814 30"


0250811 36"




Gas Pack/Rooftop HVAC




Meter



Manufactured (Mobile) Home



Furnace



Commercial Water Heater

R-22 Freon



0190610 30lb can

R-410A Freon



0190611 25lb can

Outdoor Improvements
 Anchors & Set-Up Material
 Doors & Windows
 Coatings & Cleaners
 Appliances
 Tools & Hardware
 Carpet & Flooring
 Electrical
 Plumbing
 Towing & Safety
 Heating & Cooling


HVAC Duct Tape

Meets UL 181B-FX for duct installations with HVAC equipment.

0360450 2" x 60 Yards



Fin Tool



Straightens even the most severely damaged fins. Heavy-duty spring wire bristles adjust to all settings. Tension adjustment band allows maximum rigidity. Works on all units.

0380028

Cloth Duct Tape



High-tack, excellent strength. Superior performance in sealing air handling systems. Heavy cloth content for easier tearing and additional strength. Metallized UL181B-FX Flex Duct Tape. Made in the USA.

0360455 2" x 60 Yards

Foil HVAC Tape

For duct board system sealing. Prevents heat loss. Blocks odors and moisture.

0360502 2" x 50 yds.

0360503 3" x 50 yds.



Coil & Fin Cleaner


Water-based, foaming, powerful blast spray. Convenient, easy-to-use, non-toxic, non-flammable and non-irritating cleaner degreases air conditioners and refrigeration equipment to ensure efficient operation; helps prevent overheating and motor burnout due to accumulated dust, air and grease in air spaces. Excellent vertical hold which liquefies and drains within minutes. Use on heat pumps, air conditioners, refrigerators, automobile radiators and cooling units. 20 oz.

0181375 12/Ctn.



Draft Cap

Removable, no down draft. Keeps wind and rain out of smoke pipe, yet allows fuel gases to vent. UL listed for 4" and 5" flue. Stainless steel.



0425202 5" 8/ctn.

0425208 4" 8/ctn.

PS-1 Mastic

Low to High Velocity Air Duct Sealant

PS-1 Mastic® is a fiber reinforced, non-toxic, low VOC air duct sealant used for permanently sealing the fabricated joints and seams of sheet metal air ducts, UL listed rigid fiberglass air ducts, UL listed flexible air ducts, crawl space vapor retarders, and thermal insulation. Seals damaged and leaking air ducts and conditioned spaces from air infiltration. Easily applied by brush, trowel, palm, or spray equipment.

0110507 1 gallon

0110508 2 gallon



RCD - Glasscoat

RCD Corporation's Glasscoat is a woven fiberglass mesh, coated with pressure sensitive adhesive. This strong, light weight, and fire resistant fabric is individually labeled and shrink wrapped. Glasscoat reinforces adhesives, coatings, mastics, and sealants used in the fabrication and installation of air ducts and thermal insulation. Glasscoat is also known by several generic descriptions like: fiberglass scrim, fiberglass tape, and fiberglass cloth.



0102502 White, 3" x 150'

#6 Mastic Air Duct Sealant

Low to high velocity, non-toxic adhesive-sealant for permanently sealing fabricated joints and seams of sheet metal air ducts, UL-181 listed rigid fiberglass air ducts, UL-181 listed flexible air ducts and thermal insulation. Ideal for repairing damaged and leaking air ducts and sealing conditioned spaces from air infiltration. Water based, non-flammable, high solids content, fiber reinforced, excellent longevity (actually strengthens with age), fire/mold/mildew resistant, weatherproof, elastomeric. Easy to apply and clean up.


0110500 2 Gallons

0110501 1 Gallon



Tank Bushing


Machine-cast in durable Zamac for two-line suction & return installations. Bottom-tapped for solid stub or suction line guide; 1-piece nut and ferrule for easy installation. 2" x 3/8" x 3/8"; 24/Ctn.



0230670

MPT Fill Box


For kerosene drums and skid tanks where auxiliary vents are not required. Vented overlapping top keeps out moisture; locking hasp adds protection. Heavy cast iron; 1-1/2 lbs. 24/Ctn.

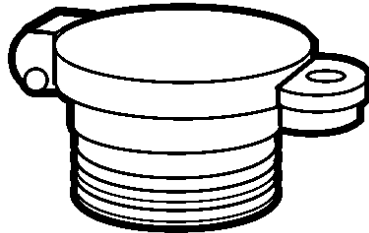

0230671

Fill Alarm & Tank Gauge

Complete unit—no assembly—remove from box, screw it to tank. Gray iron, corrosion-resistant finish. Bottom/male: 2". Top/female: 1-1/4". Weight: 2-1/2 lb. Vertical or horizontal applications.

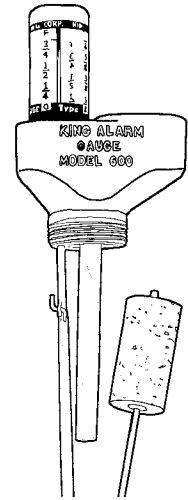

0230675 Vertical
0230676 Horizontal

Delavan® Nozzles



A = Hollow
S&B = Solid
W = Semi-Solid

- 0238324 50-80A; 12/Ctn.
- 0238326 60-80A; 12/Ctn.
- 0238327 55-90W; 12/Ctn.
- 0238328 60-80W; 12/Ctn.
- 0238330 65-90A; 12/Ctn.
- 0238332 50-90A; 12/Ctn.
- 0238334 60-90A; 12/Ctn.
- 0238336 65-80-A; 12/Ctn.

TANK TUB

Say goodbye to this unsightly mess....

Oil Storage Solution

Available in **THREE** colors to compliment today's home styles.



Cover can always be lifted to check tank gauge after installing external fill and vent.



Safe, Attractive and Affordable!

- UL Listed
- Meets and exceeds NFPA requirements for 110% containment
- Designed for both 275 and 330 gallon storage tanks
- Extends life of oil tank and prevents oil line freeze-ups
- 2-piece construction for easy installation
- 12 year warranty

- 0203600 White
- 0203601 Two-Tone Beige
- 0203602 Gray

NOT STOCKED AT ALL LOCATIONS

Forget worries about spills, leaks, freezing, gelling or condensation!

E-LITE® by DiversiTech

- ⊗ Lightweight, yet rugged
- ⊗ Drillable for securing unit
- ⊗ Uniform ribbing transfers load evenly
- ⊗ Unaffected by UV or weather
- ⊗ Subtle texture resists unit slide
- ⊗ High recycled



E Lite® is a plastic pad designed as a mounting base for air conditioning condensers. The rugged design provides uniform and generous ribbing for optimum, self-leveling ground support without inserts. E Lite® is injection molded from polypropylene, resulting in a pad that is lightweight, but not too light. A subtle texture prevents unit slide and presents a classic appearance, which is enhanced by rounded edges and a concrete gray color. Each pad is molded with its size in raised letters.



0100505	24" x 24" x 2"	0100509	36" x 36" x 2"
0100507	30" x 30" x 2"	0100510	36" x 48" x 2"
0100512	30" x 30" x 3"	0100530	38" x 48" x 3"
		0100531	45" x 58" x 3"

The Black Pad



The Black Pad is an innovative equipment Base. The Black Pad uses ground, recycled rubber in a co-injection process. The pad is extremely durable, resistant to ultraviolet light, and heavier than a completely plastic pad. The Black Pad is suitable for use with pool pump, filters, and heaters and complies with the 1997 Standard Swimming Pool Code sections 305.2 Mounting and section 405 Equipment Foundations and Enclosures.

Use 3 inch pads where local codes supercede the International code and require a pad thicker than 2".


0100498	32" x 32" x 2"
0100499	30" x 30" x 2"
0100500	30" x 30" x 3"
0100501	36" x 36" x 3"
0100502	24" x 24" x 3"
0100504	24" x 24" x 2"
0100503	36" x 48" x 3"
0100506	32" x 32" x 3"

Concrete Pads



0100518	30" x 30" x 2"
----------------	----------------

Bramec Pump-Up Heat Pump Stand

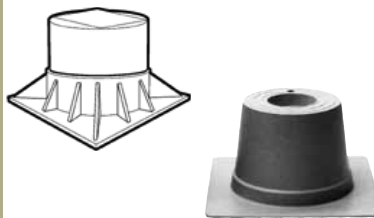

Corrosion-resistant plastic for use indoor or outdoors. Includes polymeric mastic to help prevent "walking," aid in leveling and absorb vibration and noise.

0100525	3"
0100526	6"
0100527	6" Black Cone


CladLite® Hurricane Pad



0100534	30" x 30" x 4"
0100532	36" x 48" x 4"
0100533	36" x 36" x 4"

A/C Mounting Brackets

Heavy duty, 1/8" thick steel perfect for hanging condensers and heat pumps outside of home. Can be mounted to any height to allow for easy maintenance underneath unit. No longer a need to wait for finished grade or landscaping prior to installing A/C. Pre-punched holes for easy installation. Powder coated gray finish.

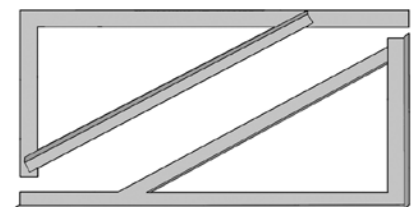

0100520	36" Pair
----------------	----------