


## WaterRise® Water Shut-Off

- ▶ Premade to save you time and money
- ▶ Self-contained in tough PVC case
- ▶ Insulation and heating cable protect against the cold
- ▶ All copper pipe and rugged Mueller valves
- ▶ 5-year guaranteed replacement of parts or complete unit
- ▶ American made
- ▶ Self-draining
- ▶ Surface shut-off

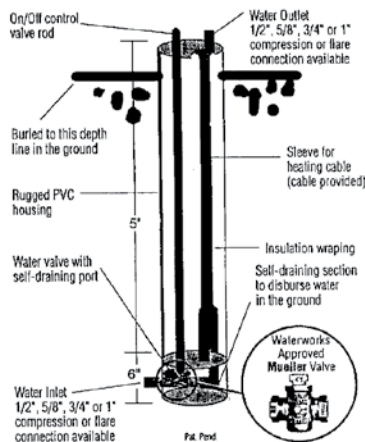

Special Order Only


## Brushes

- 0112617 1-1/2"; 36/ctn
- 0112618 3"; 12/ctn



## Universal 3-in-1 Crimping Tool


One tool for all ring sizes  
3/8", 1/2" and 3/4".



0168106

## 2-in-1 Crimping Tool

Compact and affordable  
for hard to reach places.



0168001 1/2" x 3/4"

## Ratchet-Style Pipe Cutter

Easily cuts through PVC pipe up to 1". Ratchet-action requires minimal pressure. Molybdenum stainless steel blade will not rust or break and lasts twice as long as most other cutters.



- 0380250 Cutter
- 0380251 Replacement Blades

## Pipe Thread Tape

Chemically inert, withstands alkalis, acids, oil and solvents. Temperature range: -400°F to -600°F. 1/2" x 260". 200/ctn



0360410

## Pipe & Tube Hanger Straps

**Plated Steel Hanger Straps w/Holes:**

Sturdy steel strapping with alternating bolt & nail holes. 3/4" wide.

0262602 3/4" x 100'; 5/ctn

0262604 3/4" x 10'; 25/ctn

**Plastic Hanger Straps w/Holes:**

3/4" plastic strapping, non-corrosive w/holes. Packed in dispenser box.

0262600 3/4" x 50'; 20/ctn

0262601 3/4" x 100'; 20/ctn



## Oetiker Clamp Master Ratchet Pinchers

It is imperative that all Oetiker eared clamps be closed according to specifications in order to be 100% effective. Oetiker's Clamp Master Ratchet Pinchers are light in weight, but with a heavy-duty action that provides the needed leverage to close the ears on the stainless steel clamps.



0380255

## Oetiker Stepless™ Ear Clamps

For those hard to get to places for a sure no-leak repair or installation. The patented "step-less" design provides a 360° seal around the pipe. 100/ctn



**For PEX**

0167063 3/8"

0167065 1/2"

0167066 3/4"

**For POLY**

0167069 1/2"

0167070 3/4"

## Boss Biggies Abrasive Wipes

Dual sided  
abrasive wipes  
clean paint,  
adhesives, oils  
and more from  
hands, tools and  
surfaces. 80  
wipes / tub



0181401

## All Purpose Cement

Heavy-bodied clear cement for use on ABS, PVC, and CPVC pipe and fittings up to 12" in diameter. Flows freely and provides a thick layer. Helps fill gaps in larger diameter pipe and joints.



- 0112609** 4 oz.; 24/ctn
- 0112610** 8 oz.; 24/ctn
- 0112615** 16 oz.; 24/ctn
- 0112611** 32 oz.; 12/ctn

## FlowGuard Gold 1-Step CPVC Cement

Oatey's one-step cement for CPVC is specially formulated to bond with FlowGuard Gold CPVC where all-purpose cements will not. Needs no primer, faster cure time than regular cements, low VOC, meets ASTM D-2846 & F-4 93. Exceeds environmental requirements.



- 0112630** 4 oz.; 24/ctn
- 0112631** 8 oz.; 24/ctn

## ABS-To-PVC Transition Green Cement

Medium-bodied green-colored cement for use in joining ABS to PVC in non-pressure transition joints. All schedules up to 6" dia. pipe and fittings. Recommended application temperature 40°F to 110°F. Meets ASTM D-3138.



- 0112613** 16 oz.; 6/ctn

## Pipe Joint Compound

Non-toxic, fast-set, non-hardening paste lubricates and seals threaded joints. Use on water, natural gas, steam and air lines.

- 0112801** 2 oz. Tube; 12/ctn
- 0112901** 4 oz. with Brush; 12/ctn



## ABS Cement

Medium-bodied black cement for use on ABS pipe and fittings up to 6" in diameter. For all pressure and non-pressure applications.



- 0112619** 4 oz.; 24/ctn
- 0112612** 16 oz.; 24/ctn
- 0112620** 8 oz.; 24/ctn
- 0112621** 32 oz.; 12/ctn

## PVC Cement

Regular-bodied clear cement for PVC pipe and fittings up to 3" dia. Use on Schedule 40 and Schedule 80 potable water pressure pipe, gas, conduit, drain waste and vent pipe. Flows freely, sets-up quickly. Apply at temperatures 40° - 90° F. NSF and UPC approved. Exceeds ASTM D-2564.



- 0112614** 4 oz.; 24/ctn

## Cold Weather Cement

Medium bodied clear cement for use on PVC pipe and fittings up to 6" dia. Formulated for fast initial set up at temperatures down to -5° F to 100° F Sch. 40 and Sch. 80. Non-pressure, DWV, up through 4" diameter, no primer needed where local codes permit. Recommended for all grades and types of PVC pipe and fittings, potable water, pressure pipe, gas, conduit and DWV. Meets ASTM D-2564.



- 0112625** Pint; 24/ctn

## Rain-R-Shine

Fast-setting blue PVC cement for solvent welding under damp or wet conditions; effective when quick pressurization is needed. Ideal for sprinkler or pool installations.



- 0112607** 16 oz.; 24/ctn

## Purple Primer/Cleaner

All purpose primer/cleaner for PVC/CPVC pipe and fittings. Purple tint tells you primer has been used. Removes surface dirt, grease and grime; also softens pipe surface to allow for a fast and permanent solvent weld. Flows freely, evaporates quickly.



- 0112616** 8 oz.; 24/ctn
- 0112622** 32 oz.; 12/ctn

## Clear Cleaner

A clear cleaner recommended for use on ABS, PVC and CPVC pipe and fittings, all schedules and diameters. A fast-acting cleaner to remove surface dirt, grease and grime. Flows freely and evaporates quickly. Apply at temperatures 40°F to 100°F.



- 0112640** 8 oz.; 24/ctn

## Plumber's Putty



- 0112645** 14 oz.

## CAMCO Antifreeze

Protect your potable water system from freeze damage. Camco antifreezes inhibit fouling and corrosion while preventing algae growth. They also help in lubricating pumps and valves throughout the system. Choose a temperature-specific product designed for your winterizing needs. Safe and tasteless.




- 0190602** Freeze Ban -50
- 0190601** Winter Ban -50
- 0190603** Arctic Ban -50  
(PG/Ethyl Alcohol Blend)



## Blow Out Plugs

To remove water from lines, screw into water intake fitting and apply air pressure.



- 0192010** Plastic; 50/ctn
- 0192011** Brass; 50/ctn

## Hand Pump

Easily, economically installs anti-freeze. One end of adapter hose fits over faucet; pump fits into anti-freeze bottle with other end of tube over pump inlet.



- 0192005** 10/ctn

## Fiberglass Pipe Insulation Kit

Frost King Fiberglass Pipe Insulation Kit, comes with 25' plastic vapor barrier.

- 1.6 R-Value. Package covers
- 17' of 1/2" Pipe
  - 12' of 3/4" pipe
  - 10' of 1" pipe.

For either hot or cold water pipes.  
Made In USA.

- 0270801** 3" x 1/2" x 25' roll.



## Pow-R Wrap

A strong, heat resistant, permanent and economical repair. Works on virtually every kind of pipe and hose. Pow-R Wrap is a complete, self contained kit that includes a resin impregnated fiberglass tape in foil bag, Pow-R Stick epoxy putty to enhance repairs, 1 pair of protective gloves and complete installation instructions.

- \* Water activated fiberglass wrap
- \* Holds up to 600 PSI
- \* Works on wet, dirty or corroded surfaces
- \* Safe for drinking water system repairs



- 0270600** 2" x 48" to repair up to 1" diameter pipe
- 0270601** 3" x 132" to repair from 1/4" to 3" dia. pipe

## Go-Aerosol Primer Cleaner w/cement


Spray weld. Multi-purpose, one step primer cleaner and cement.

- 0112600** Primer cleaner & ABS/PVC. 11oz.
- 0112603** Primer cleaner & ABS/PVC. Green. 11oz.
- 0112602** Primer cleaner & ABS/PVC/CPVC. 4.5oz.



## Pre-Slit Tubular

Single step foam pipe insulation with half-slit to easily slip over pipe. Self-closing so you need no tape. Flexible for easy bending. 6' long, bulk.



### 3/8" THICK WALL

- 0270525** 1/2" Copper or 1/4" Iron pipes
- 0270526** 3/4" Copper or 1/2" Iron pipes
- 0270527** 1-1/4" Copper or 1" Iron pipes

### 1/2" THICK WALL

- 0270523** 1/2" Copper or 1/4" Iron pipes
- 0270524** 3/4" Copper or 1/2" Iron pipes


### 1" THICK WALL - R 6.4

- 0270495** 1" Copper pipes

## Pressure Regulators

### Cash-Acme EB-75 Compact


Fully pressure-balanced piston, automatically reduces and regulates high inlet pressures down to 45 psi at standard factory setting. Built-in back pass check which operates independently of the regulator, allowing water to flow back through the regulator in cases of thermal expansion caused by hot water heating devices. Iron body, threaded connections, iron spring chamber, brass piston and seat ring. EP rubber seat disc and diaphragm and a inbuilt brass strainer screen.



**0451001** 3/4"

### Watts N250

Stainless steel seat, integral strainer. Unitized construction. High temperature resisting diaphragm for hot or cold water. For supply pressures up to 250 lbs. Adjustable reduced pressure range 30-60 lbs. Standard setting 50 lbs. All working parts easily and quickly serviceable without removing valve from line. 3/4" x 3/4" FPT.



**0451002** 48/ctn

## Water Hoses

### Blackline Water Hoses

650 pound burst test pressure, solid brass fittings, tasteless and odorless. Withstands freezing. May be hooked up underground. Thermostatically controlled heat tape is recommended in winter.



**0440101** 15' Black; 20/ctn

**0440102** 25' Black; 13/ctn

### Valterra Drinking Water Hose

High pressure, drinking water safe. Non-toxic, FDA approved materials. 160 PSI working pressure. Easy to use hose gripper. White.



**0440199** 1/2" x 25'; 10/ctn

### Hose Clamps

**0262500** 1/4" - 5/8"

**0262501** 1/2" - 1-1/8"

**0262502** 1-7/8" - 3-3/4"

**0262503** 3-1/8" - 5"



### Quick Brass Disconnect

For garden hoses

**0163211**




### Repair Couplings

For galvanized & plastic pipe.

**0163210** 1/2"; 28/ctn

**0163209** 3/4"; 15/ctn



### Brass Hose Bibb

Cast brass male hose bibb. 3/4" hose.

**0374413** 1/2"

**0374414** 3/4"



## Hose Washer & Filters

**0379509** Washers; 10/Bag


**0379500** Filter Washer; 3/Card



## Washing Machine Valve

One-piece 1/2" brass body with 2.5" tailpiece. Combination .5 solder or threaded connection with locknut. 6/ctn

**0379915**



# Freezeless Wall Faucet

Stainless steel, will not wire draw. Adjustable flange pivots to flush with any wall. Adjustable packing nut with teflon impregnated packing. Modern handle fits with precision spline; can be used as loose key. Nozzle 3/4" male hose thread. 10".

- 0378612** 10"-3/4" MIPx1/2" FIP
- 0378613** 10"-1/2" MIPx1/2" C
- 0378614** 8"-3/4" MIPx1/2" FIP



# Anti-Siphon Frost-Proof Sill Cock


Chrome-plated, silver-soldered. 1/2".

- 0378620** 8"
- 0378621** 10"
- 0378622** 12"



# 1/2 Turn Washing Machine Valves

Long shank MIP valve with easy on/off control and color-coded handles. Forged brass construction eliminates porosity problems of traditional cast valves. UPC and CSA listed.



- 0376905** Blue Handle
- 0376906** Red Handle

# Outlet Box

Universal for right- or left-hand drain. Rust-proof, beige. Holes 3" apart.

**OS:**  
11-3/4" W x 10" H x 2-1/2" D.  
**Cutout:**  
9-1/8" W x 7-1/4" H x 2-1/2" D.

**0440206**



# Copper Tubing

- 0165121** 3/8 OD, 50'
- 0165132** 1/2 OD, 50'
- 0165133** 5/8 OD, 50'



# Flexible Pressure Water Line

Medium density polyethylene. Maximum working pressure at 73° F is 100 psi 1/2" nom, size ID is .6221 outside diameter .742, wall thickness .060 3/4" nom size ID is .824, outside .966, wall thickness .071. Not NSF approved.

- 0321864** 3/4" x 100'



# Pressure Water Line

Polyethylene. NSF approved and conforms to ASTM-D-2239. Maximum working pressure at 73° F is 160 PSI. Nom size 3/4", ID .824, OD 1.008, wall thickness .092.

- 0321866** 3/4" x 100'